
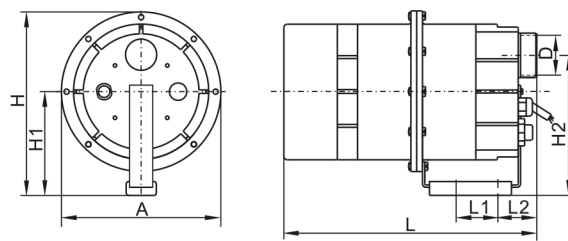


安装外形图 Overall dimension

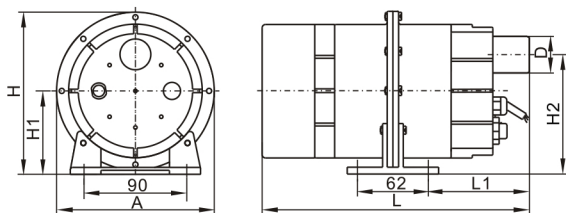

型号 Model	外形尺寸 Shape size (mm)									
	直伸出口 smooth outlet			螺纹出口 threaded Outlet			A	H	H1	H2
	L	L1	D	L	L1	D				
AP200/300/400X/700X-V2	262	88.5	φ32	247	73.5	G1½	φ138	142	73	105
AP200/300-V1	234	88.5	φ32	219	73.5	G1½	φ138	142	73	105
AP400/700/900-V2	276	97	φ32	269	90	G1½	φ168	171	87	124
AP400/700/900-V1	249	97	φ32	242	90	G1½	φ168	171	87	124

型号 Model	外形尺寸 Shape size (mm)										
	直伸出口 smooth outlet			螺纹出口 threaded Outlet			L1	A	H	H1	H2
	L	L2	D	L	L2	D					
AP200/300/400X/700X-V2	262	54	φ 32	247	34.5	G1½	36	φ138	151	82	114
AP200/300-V1	234	54	φ 32	219	34.5	G1½	36	φ138	151	82	114
AP400/700/900-V2	276	50.5	φ 32	269	42.5	G1½	52.5	φ168	179	95	130
AP400/700/900-V1	249	50.5	φ 32	242	42.5	G1½	52.5	φ168	179	95	130

- 注: 1.图中D 为螺纹连接方式时, 可配 φ32、φ33.5接头。
2.图中D 为直伸连接方式时, 可配 φ32、φ33.5连接管
1. D in fig.is thread connection that union of φ32 and φ33.5 available
2. D in fig.is direct connection that only φ32 and φ33.5 available.



EN 60335-1: 2012+A11
EN 60335-2-41: 2003+A1+A2
EN 60335-2-60: 2003+A1+A2+A11+A12
EN 62233 : 2008
EN60335-2-30 : 2009
EN 60335-2-35 : 2002+A1+A2
EN60335-2-80 : 2003+A1+A2


SAA

AS/NZS60335.1
AS/NZS60335.2.41



可选装空气开关
Optional air switch
15A/250V

欧洲款
EUROPEAN TYPE

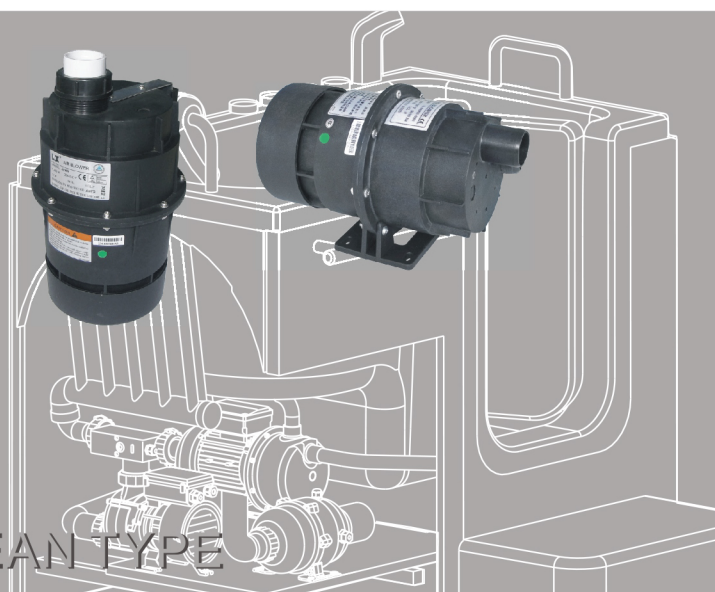

技术参数列表 Technical parameter list

型号 Model	输入功率 Power W	电流 (Amps)		最大风压 Max Pressure (Mpa)	最大风量 Air volume (m³/min)	风泵噪音 Noise Level dB(A)	可配气嘴数 Jets Qty (pc)	建议使用水深 Recommended water depth (m)	毛重 G.W (Kg)	包装尺码 Packing size (mm)
		110-120V	220-240V							
AP200-V2	200	2.0	1.2	0.006	0.8	<63	6~12	0.3	2.0	290×155×175
AP300-V2	300	3.0	1.7	0.009	1.2	<65	8~16	0.4	2.0	290×155×175
AP400X-V2	400	4.0	2.5	0.014	1.5	<69	12~24	0.6	2.0	290×155×175
AP700X-V2	700	7.0	3.3	0.022	1.85	<71	16~32	0.8	2.0	290×155×175
AP400-V2	400	4.0	2.5	0.014	1.65	<68	12~24	0.6	2.8	300×190×215
AP700-V2	700	7.0	3.3	0.018	2.0	<70	16~32	0.8	2.8	300×190×215
AP900-V2	900	9.0	4.5	0.025	2.4	<74	20~40	1.0	2.8	300×190×215
AP200-V1	200	2.0	1.2	0.008	1.1	<64	6~12	0.3	1.8	260×155×175
AP300-V1	300	3.0	1.7	0.011	1.3	<66	8~16	0.4	1.8	260×155×175
AP400-V1	400	4.0	2.5	0.015	1.7	<70	12~24	0.6	2.6	275×185×205
AP700-V1	700	7.0	3.3	0.020	2.2	<72	16~32	0.8	2.6	275×185×205
AP900-V1	900	9.0	4.5	0.025	2.4	<76	20~40	1.0	2.6	275×185×205



浴缸水循环
Recirculation of water in Bathtub pump



SPA池水循环
Recirculation of water in SPA equipment

工作条件

输送介质: 干燥空气
环境温度: ≤40℃
最大工作压力: 0.1 MPa

Working conditions

Transmission Medium: Dry air
Environmental temperature: ≤40℃
Max.working pressure: 0.1MPa

序号 NO.	名称 Name
1	十字盘头螺钉组合件 cross raised head screw assembling
2	电缆封头 Cable head
3	接头组件 Union components
4	上壳 Upper part of housing
5	O形圈 O-Ring
6	上壳胶垫 On shell pads
7	熔断器 Fuse
8	电机 Motor
9	下壳胶垫 Pad under the shell
10	下壳 Bottom part of housing
11	六角螺母 Hexagonal Nut
12	进气过滤海绵 Air intake filter sponge
13	气盖 Air cover
14	十字槽盘头自攻螺钉 Cross recessed pan head tapping screws

序号 NO.	名称 Name
15	提手 Handle
16	防震胶垫 Shock pad

